

(19) World Intellectual Property
Organization
International Bureau





(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/089860 A1

- (51) International Patent Classification⁷: **C07C 17/25**, (74) Agents: **FORSTMAYER, Dietmar et al.**; Boeters & Lieck, Bereiteranger 15, 81541 München (DE).
21/06, B01J 19/24
- (21) International Application Number:
PCT/EP2004/002763
- (22) International Filing Date: 17 March 2004 (17.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
103 16 987.3 11 April 2003 (11.04.2003) DE
103 26 248.2 6 June 2003 (06.06.2003) DE
- (71) Applicant (for all designated States except US): **VINNO-LIT GMBH & CO. KG** [DE/DE]; Profit-Center VinTec, Werk Gendorf, 84504 Burgkirchen (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KAMMER-HOFER, Peter** [DE/DE]; Ortlehner Strasse 48, 84508 Burgkirchen (DE). **MIELKE, Ingolf** [DE/DE]; Hochstaufenstrasse 16, 84508 Burgkirchen (DE). **SCHWARZMAIER, Peter** [DE/DE]; Billerstrasse 10, 84556 Kastl (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND PROCESS FOR THE PRODUCTION OF VINYL CHLORIDE BY THERMAL CRACKING OF 1,2-DICHLOROETHANE

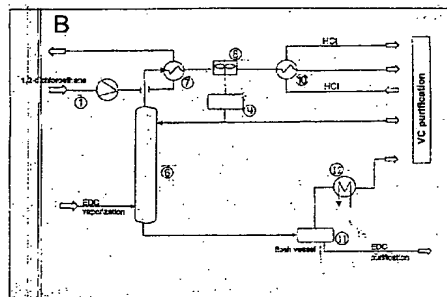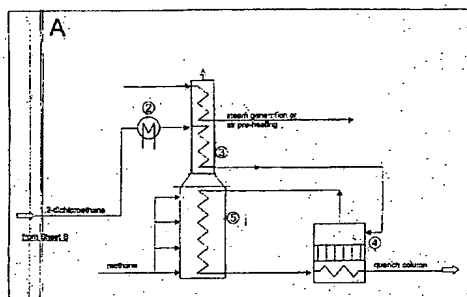

(57) Abstract: The invention relates to a process for the production of vinyl chloride by thermal cracking, in which the energy balance, the operating time of the cracking furnace and/or the yield of the reaction are distinctly enhanced in comparison with the prior art. A pressure of from 1.4 to 2.5 MPa is established in the cracking coil at a temperature of from 450 to 550°C and, for pre-heating the EDC (=1,2-dichloroethane) introduced, *inter alia* the waste heat of the gas stream leaving the top of the quench column is utilized.

Description

Apparatus and process for the production of vinyl chloride by thermal cracking of
1,2-dichloroethane

5

The invention relates to a process for the production of vinyl chloride by thermal cracking of 1,2-dichloroethane (EDC) in which it has been possible to improve the energy balance, the operating time (maintenance interval) of the cracking furnace and/or the yield of vinyl chloride in comparison with the prior art (cf. Table 1).

10

Processes for the production of vinyl chloride by thermal cracking are known, for example, from DE 34 40 685. The latter describes heating the 1,2-dichloroethane in the convection zone of the cracking furnace, vaporizing it with steam in an external heat exchanger (EDC vaporizer) and feeding it in gaseous form into the cracking furnace at a temperature of
15 195°C under a pressure of 1.3 MPa (low-pressure process). The cracking gases are subsequently fed for working-up. In the entire system, there is a low system pressure of 1.3 MPa, which has a detrimental effect; when removing hydrogen chloride a high condensation energy is required since the condensation of the gas has to be carried out at very low temperature. In addition, the high thermal energy with which the cracking gas stream
20 leaves the cracking furnace (494°C) is not put to use.

Disadvantages of that process are especially

a) the high power consumption per tonne of target product for generating the refrigeration energy necessary for condensation and hence removal of the by-product hydrogen
25 chloride

b) the high expenditure of energy which the vaporization of the EDC requires before it is fed into the cracking furnace and

c) the greater energy requirement in the cracking furnace resulting from the low entry temperature of the EDC into the cracking furnace of approximately only 195°C.

30

There is also known from EP 0 264 065 B1 a process for the production of vinyl chloride by thermal cracking wherein the thermal energy of the cracking gas (that is to say, the gas stream that leaves the radiation zone of the cracking furnace and the temperature of which at that point is said to be about 496°C) is partly utilized by a heat exchanger in which EDC
35 that has already been passed through the convection zone of the cracking furnace and has

thus been heated is vaporized. In that case also, however, the thermal energy of the vapour leaving the quench column which follows the cracking furnace is not put to use. In addition, the pressure in the cracking furnace is relatively high (greater than 2.5 MPa, high-pressure cracking), so that slight temperature fluctuations lead to extreme pressure fluctuations. For example, pressure fluctuations in the EDC vaporizer upstream of the cracking furnace, which affect the reaction time and hence the residence time of the dichloroethane in the cracking furnace, cannot be compensated for.

The object of the invention is therefore to provide an apparatus and a process for the production of vinyl chloride by thermal cracking of 1,2-dichloroethane (EDC), in which the economic efficiency is improved in comparison with the prior art.

The invention relates to an apparatus for the production of vinyl chloride by thermal cracking of 1,2-dichloroethane, comprising at least a cracking furnace, a quench column and a purification facility in that order, wherein, in the feed line through which 1,2-dichloroethane is fed into the radiation zone of the cracking furnace, a predetermined pressure in the range of from 1.4 to 3.5 or 1.5 to 3.5 or 1.4 to 2.5 MPa is ensured and at least a first heat exchanger is arranged by means of which pressure fluctuations and temperature fluctuations in the EDC vaporization are compensated for.

The invention also relates to a process for the production of vinyl chloride by thermal cracking of 1,2-dichloroethane in a cracking furnace, in which a medium pressure of from 1.4 to 2.5 MPa is maintained in the system and an externally heatable and separately regulatable heat exchanger is provided by means of which pressure fluctuations and temperature fluctuations within the system can be compensated for.

Other advantageous embodiments of the invention will be apparent from the subsidiary claims, the description and the Figure.

According to one embodiment of the apparatus and of the process, the 1,2-dichloroethane is heated, before reaction thereof in the radiation zone of the cracking furnace, using the heat of the quench waste gas, that is to say, the waste heat of the top stream of the quench column. According to an especially preferred form of implementation, other waste heat of the system can also be used for heating the 1,2-dichloroethane that is to be introduced into the radiation zone of the cracking furnace. It is especially advantageous in that case for

that system for heating the EDC to be additionally combined with a heat exchanger that leads through the convection zone of the cracking furnace and utilizes the waste heat of the flue gases of the cracking furnace.

- 5 The first heat exchanger may also be referred to as a trimming heat exchanger since, for example, in addition to regulating pressure, it can also be used as an externally vapour-operated heat exchanger for fine adjustment of the heat requirement in the EDC cracking.

10 That first heat exchanger, which can also be used for fine adjustment of the temperature of the 1,2-dichloroethane feedstock, is preferably arranged between a second heat exchanger, by which the waste gases of the top stream of the quench column are put to use, and a third heat exchanger that is integrated into the convection zone of the cracking furnace.

- 15 That external energy supply has proved advantageous for better regulation of the pressure in the cracking unit. In that manner, that is to say, by supplying external energy, the pressure fluctuations in the EDC vaporization and hence in the feed line can be compensated for. It is advantageous in that case for an automatic control system to be provided which measures the pressure in the EDC vaporization and, if the pressure changes, automatically
20 or manually alters the temperature of the externally heated first heat exchanger in such a manner that the pressure returns to a predetermined value.

According to an especially preferred form of implementation, 1,2-dichloroethane is heated to almost boiling temperature in three stages, utilizing the energy content of the hot cracking gases and of the flue gases of the cracking furnace:
25

- in the second heat exchanger, which utilizes the waste heat of the quench column, liquid 1,2-dichloroethane is heated to approximately 120 - 150°C by the saturated vapour mixture (mainly comprising vinyl chloride, hydrogen chloride and unreacted 1,2-dichloroethane) that leaves the quench column at the top,
- 30 - in the first heat exchanger (trimming heat exchanger = vapour-operated heat exchanger for pressure regulation and/or fine adjustment of the heat requirement in the EDC cracking), the liquid 1,2-dichloroethane is further heated externally by steam,
- in a third heat exchanger in the convection zone of the cracking furnace, the 1,2-dichloroethane, which is still liquid, is heated by the flue gases of the cracking furnace to
35 200 - 250°C.

The 1,2-dichloroethane which is still liquid after that 3-stage heating process is vaporized in an external, so-called "EDC vaporizer" using the waste heat of the hot cracking gases having a temperature of 450 - 550°C issuing from the cracking furnace, under a pressure of from 1.4 to 3.5 MPa, preferably from 1.4 to 2.5 MPa and especially from 1.6 to 2.2 MPa.

The then gaseous 1,2-dichloroethane is passed into the radiation zone of the cracking furnace and heated to above 450°C within 5 - 10 seconds, preferably within 6 - 7 seconds. The energy supply to the cracking furnace is preferably distributed as follows:

1st burner row (EDC entry):	30 - 70 %
burner row(s) middle:	20 - 40 %
last burner row (cracking gas exit):	10 - 20 %

The total residence time of the EDC in the radiation zone of the cracking furnace should be 15 - 30 seconds, preferably 18 - 23 seconds. The hot cracking gas having a temperature of from 450°C to 550°C is passed through the external EDC vaporizer and thereafter is cooled to saturated vapour temperature in the quench column by direct cooling with a liquid mixture of 1,2-dichloroethane, vinyl chloride and dissolved hydrogen chloride. The pressure in the quench column is 1.4 - 2 MPa, preferably 1.5 - 1.7 MPa.

The top stream of the quench is advantageously used for pre-heating liquid 1,2-dichloroethane and is then cooled to 50 - 60°C with cooling water or by means of air coolers. The gas stream and the liquid stream from the quench system are then fed for distillation to separate hydrogen chloride, vinyl chloride and unreacted 1,2-dichloroethane. In the first stage, hydrogen chloride is separated from vinyl chloride and 1,2-dichloroethane over the top of the column. Owing to the quench pressure of 1.5 - 1.7 MPa, the first distillation column is operated at 1.2 MPa and -25°C in the top.

In the upper portion of the convection zone of the cracking furnace, steam can be obtained and/or the combustion air for the cracking furnace can be pre-heated, while the flue gases are simultaneously cooled.

Surprisingly, it has been found that adherence to specific operating parameters, especially a pressure in the cracking coil of 1.6 - 1.9 MPa, to rapid heating of the 1,2-dichloroethane in

the first portion of the radiation zone and adherence to the above-described residence times and/or specific firing in the individual cracking furnace segments drastically reduce the formation of by-products and at the same time prolong the operating time of the furnace. The refrigeration output required to liquefy the return material is, by virtue of the pressure in the first distillation column, only 35.4 kW/t of target product.

The EDC yield obtained (yield of vinyl chloride based on reacted pure 1,2-dichloroethane) according to the described process is 99.5 %. Owing to the high entry temperature of the 1,2-dichloroethane into the radiation zone of the cracking furnace the consumption of primary energy in the cracking furnace is also very low in comparison with other, known processes.

The following Table shows the invention in comparison with the prior art DE 34 40 685 and EP 0 264 065 discussed in the introduction.

Table: Evaluation of the test results

	according to the invention	similarly to DE 34 40 685	similarly to EP 0 264 065
formation of by-products in kg per tonne of target product	11	17	10
1,2-dichloroethane yield in % by weight	99.52	99.3	99.54
total energy consumption of EDC cracking in kW/t of vinyl chloride	904	890	943
energy consumption of EDC vaporization in kW/t of vinyl chloride	201 (by cracking gas)	210 (by cracking gas)	235 (by steam)
furnace operating time between cleaning periods in months	19	10	20

	according to the invention	similarly to DE 34 40 685	similarly to EP 0 264 065
refrigeration output for liquefying the hydrogen chloride at the top of the HCl column in kW/t of target product	35.4	33.7	92.5

Definitions:

- 5 formation of by-products = the sum of all the by-products resulting in the cracking of
 1,2-dichloroethane
- 1,2-dichloroethane yield = yield of vinyl chloride based on the pure, reacted
 1,2-dichloroethane
- 10 total energy consumption: total primary energy used in the cracking furnace (tube reactor)
 in the form of heating gas or heating oil
- energy consumption of EDC vaporization: energy used to heat 1,2-dichloroethane in the
 EDC vaporizer to boiling temperature and for the total vaporization of the 1,2-
15 dichloroethane stream to the cracking furnace (tube reactor); in the case of the high-
 pressure cracking and the invention that energy is extracted from the cracking gas
 after it leaves the tube reactor, in the case of the low-pressure cracking that energy
 is supplied externally by means of steam.
- 20 furnace operating time = the time after which the reaction has to be discontinued in order to
 clean the cracking furnace (tube reactor).
- refrigeration output for liquefying hydrogen chloride in the HCl column = the electrical
 energy that has to be used to generate cold in order to condense the quantity of
25 hydrogen chloride required as return material in the first distillation column (HCl
 column).

The tabular presentation strikingly shows that the method according to the invention

described herein makes it possible for the first time to obtain the three decisive advantages of low-pressure cracking, a high yield, a low rate of by-product formation and a long operating time of the furnace, with an energy consumption that bears comparison with high-pressure cracking.

5

The invention will also be described below with reference to a Figure that shows a flow diagram of a process and, the same time, a schematic illustration of the arrangement of an apparatus for the production of vinyl chloride.

10 The Figure is divided into two parts A and B. In the first part A, the cracking furnace and the vaporization unit which makes primary use of the waste heat of the cracking gas stream are shown. In the second part B, the quench column and the feed lines to the purification unit can be seen.

15 The process may be carried out, for example, as follows:

42 t/h of 1,2-dichloroethane at a temperature of 120°C are brought to a pressure of 3.6 MPa by means of a pump 1 (sheet B) and pre-heated to approximately 160°C *via* the second heat exchanger 7 (sheet B), which is heated by saturated vapour gas stream from the quench column, and *via* the first heat exchanger and the trimming heat exchanger 2 (sheet A) which is required to regulate the pressure in the EDC vaporizer, and are fed to the convection zone 3 (sheet A) of the cracking furnace 1 (sheet A). In the convection zone 3, the 1,2-dichloroethane is heated to 230°C by means of the flue gases and, depending on the fill state of the external 1,2-dichloroethane vaporizer, is passed *via* a regulating valve into the EDC vaporizer 4 (sheet A). By means of the hot vinyl-chloride-containing cracking gases having a temperature of approximately 490°C which flow through the tubes of the external 1,2-dichloroethane vaporizer, the 1,2-dichloroethane is heated to boiling temperature and vaporized at a pressure of 2.2 MPa. The hot 1,2-dichloroethane having a temperature of 232°C is fed *via* a regulating valve to the upper portion of the radiation zone 5 of the cracking furnace 1 (sheet A). The cracking furnace 1 is fired, for example, with 1270 Nm³/h of natural gas. The distribution of the heating gas to the 4 rows of burners is, for example, as follows:

1st row top (EDC entry) approximately 40 % of the total quantity of natural gas
2nd row top/middle approximately 30 % of the total quantity of natural gas
3rd row bottom/middle approximately 18 % of the total quantity of natural gas
35 4th row bottom (cracking gas exit) approximately 12 % of the total quantity of natural gas

The total conversion of 1,2-dichloroethane to vinyl chloride in the example actually carried out was 55.9 %.

- 5 The cracking gas stream, consisting of vinyl chloride, 1,2-dichloroethane, hydrogen chloride and by-products, flows at approximately 490°C out of the radiation zone of the cracking furnace into the external EDC vaporizer.

10 That stream is cooled to 260°C in the vaporizer by vaporization of EDC and is fed to a quench column 6 (sheet B). The pressure in the top of the quench column 6 is 1.6 MPa. The cracking gas stream that has been saturated by means of a liquid mixture of 1,2-dichloroethane, vinyl chloride and hydrogen chloride is partially condensed in an air cooler 8 (sheet B). While regulating its level, the liquid is pumped from the recycling vessel 9 (sheet B) by means of a pump to a column in which HCl is separated over the top from VCM,
15 unreacted EDC and by-products. The uncondensed gas stream is cooled in a further heat exchanger 10 (sheet B) and likewise fed to the above-mentioned distillation separation process.

20 The bottom stream from the quench column 6 is fed to a one-stage flash vessel 11 (sheet B) for separation of solids. The solids-free top stream of the flash vessel is condensed in a heat exchanger 12 (sheet B) and pumped to the above-mentioned distillation column. The vinyl-chloride-free and hydrogen-chloride-free bottom stream of the flash vessel is delivered for EDC purification by distillation.

- 25 For the entire system described herein by way of example a by-product balance was drawn up as follows:

analysis of feed 1,2-dichloroethane to the cracking furnace
analysis of the hydrogen chloride stream of the HCl column to the oxychlorination
analysis of the bottom stream of the HCl column to the vinyl chloride column
30 analysis of the bottom stream of the flash vessel to the vacuum column

The by-product balance corresponding to Example 1 gives 11 kg of by-products per tonne of target product (vinyl chloride) at a cracking conversion of 55.9 %. The 1,2-dichloroethane yield was 99.52 % (by weight).

The operating time of the cracking furnace until the next cleaning operation was 19 months.

The energy consumptions were as follows:

- energy consumption of the EDC cracking: 904 kW/t of vinyl chloride
 - 5 - energy consumption for vaporization of 1,2-dichloroethane by means of cracking gas (already included in the 904 kW)
 - electrical energy for liquefying hydrogen chloride at the top of the first distillation column: 35.4 kW/t of vinyl chloride
- 10 According to further embodiments of the process, in addition to being used to heat the EDC, the convection zone of the cracking furnace serves to generate steam and/or to heat combustion air.

- 15 A further embodiment provides that the cooling of the cracking gases takes place for the most part within the quench by directly contacting the hot cracking gases with cooled, liquid EDC, vinyl chloride and hydrogen chloride which, for example, is sprayed into the quench in counter-current.

- 20 A further form of implementation provides that the cooling of the cracking gases takes place for the most part within the quench on column plates that are charged with cooled, liquid EDC from the top and in counter-current to the cracking gases.

- 25 A further form of implementation of the process is characterised in that the distribution of the heating medium of the cracking furnace to the individual rows of burners is regulated by measuring the product temperature per cracking furnace segment and regulating the fuel supply accordingly.

- 30 A further embodiment of the process is characterised in that the first distillation stage for removal of hydrogen chloride is operated under a condensation pressure of from 1.1 to 1.3 MPa and at a condensation temperature of from -22°C to -26°C.

- 35 A further embodiment of the process is characterised in that the stream containing high-boilers and solids which issues from the bottom of the quench column is freed of solids in a one-stage vaporizer and is fed by pump to the column for removal of hydrogen chloride.
- The stream containing solids and high-boilers that has been freed of vinyl chloride and

hydrogen chloride is fed for distillation to recover 1,2-dichloroethane.

A further form of implementation of the process is characterised in that the stream containing high-boilers and solids which issues from the bottom of the quench column is pre-purified in a sedimentation vessel to remove coarse solids particles and is then divided in a distillation column into a hydrogen-chloride-free and vinyl-chloride-free bottom stream, which consists for the most part of EDC, and a solids-free top stream, which contains the total proportion of hydrogen chloride and vinyl chloride. The distillate stream which has been freed of solids is fed, for example, by pump to the column for removal of hydrogen chloride. The bottom stream containing solids and high-boilers which has been freed of vinyl chloride and hydrogen chloride is then fed for distillation, for example to recover 1,2-dichloroethane.

A further form of implementation of the process is characterised in that the stream containing high-boilers and solids which issues from the bottom of the quench column is freed of solids in a two-stage vaporizer and is fed by pump to the column for separation of hydrogen chloride. The stream containing solids and high-boilers that has been freed of vinyl chloride and hydrogen chloride is then optionally fed for distillation to recover 1,2-dichloroethane.

A further form of implementation of the process is characterised in that, in the first distillation stage, a mixture of hydrogen chloride and vinyl chloride is removed over the top as distillate and a mixture of vinyl chloride and 1,2-dichloroethane is removed *via* the bottom of the column.

One form of implementation of the apparatus is characterised in that it comprises a trimming heat exchanger, an EDC cracking furnace comprising a convection zone and a radiation zone, a quench column having a heat exchanger at the top, an air and/or water cooler as a quench top condenser, at least one pump receiver, a quench bottom flash vessel, a quench bottom condenser and a heat exchanger for cooling the quench top gas stream before it enters the distillation.

By means of the invention disclosed herein it is possible for the first time to improve the energy balance of the thermal cracking of 1,2-dichloroethane, to reduce the residence time of the gases in the cracking furnace, to restrict the formation of by-products and thereby to

prolong the operating time of the cracking furnace, that is to say the interval of time between two maintenance periods.

5 The invention relates to a process for the production of vinyl chloride by thermal cracking, in which the energy balance, the operating time of the cracking furnace and/or the yield of the reaction are distinctly enhanced in comparison with the prior art. A pressure of from 1.5 to 3.5 MPa is established in the cracking coil at a temperature of from 450 to 550°C and, for pre-heating the EDC (=1,2-dichloroethane) introduced, *inter alia* the waste heat of the gas stream leaving the top of the quench column is utilized.

Patent Claims

1. An apparatus for the production of vinyl chloride by thermal cracking of 1,2-dichloroethane, comprising at least a cracking furnace, a quench column and a purification facility
5 in that order, wherein, in the feed line through which 1,2-dichloroethane is fed into the radiation zone of the cracking furnace, a predetermined pressure in the range of from 1.4 to 2.5 MPa is ensured and at least a first heat exchanger is arranged by means of which pressure fluctuations and temperature fluctuations in the EDC vaporization are compensated for.
10
2. An apparatus according to claim 1, in which a second heat exchanger, operated at least partly by the waste heat of the quench column, is additionally arranged in the feed line.
- 15 3. An apparatus according to claim 1 or claim 2, wherein a third heat exchanger, operated at least partly by the waste heat of the flue gases present in the convection zone of the cracking furnace, is additionally arranged in the feed line.
4. A process for the production of vinyl chloride by thermal cracking of 1,2-dichloroethane
20 in a cracking furnace, in which a medium pressure of from 1.4 to 2.5 MPa is maintained in the system and an externally heatable and separately regulatable heat exchanger is provided by means of which pressure fluctuations and temperature fluctuations within the system can be compensated for.
- 25 5. A process according to claim 4, wherein a second heat exchanger brings the EDC to 120-150°C
6. A process according to either claim 4 or claim 5, wherein the second heat exchanger in the EDC feed line serves to heat the EDC that is to be introduced into the first heat
30 exchanger.
7. A process according to any one of claims 4 to 6, wherein a third heat exchanger heats the EDC to 200-250°C.

8. A process according to any one of claims 4 to 7, wherein the pressure in the cracking coil in the radiation zone of the cracking furnace is from 1.6 to 2.2 MPa.

9. A process according to any one of claims 4 to 8, wherein the pressure in the cracking coil in the radiation zone of the cracking furnace is from 1.8 to 2.1 MPa.

10. A process according to any one of the preceding claims 4 to 9, wherein the temperature in the cracking coil in the radiation zone of the cracking furnace is from 450 to 550°C.

11. A process according to any one of the preceding claims 4 to 10, in which the EDC is introduced into the cracking furnace in gaseous form.

12. A process according to any one of the preceding claims 4 to 11, in which the EDC is heated in the cracking furnace to at least 450°C within from 5 to 10 seconds.

13. A process according to any one of the preceding claims 4 to 12, in which the total residence time of the EDC in the radiation zone of the cracking furnace is from 15 to 30 seconds.

14. A process according to any one of the preceding claims 4 to 13, in which the energy supply to the cracking furnace is implemented in three burner row stages of which each stage may comprise one or more burners, the first burner row stage, at the EDC entry, providing from 30 to 70 %, the second, middle burner row stage providing from 20 to 40 % and the third burner row stage, at the exit of the cracking gases, providing from 10 to 20 %.

15. A process according to any one of the preceding claims 4 to 14, in which the pressure in the quench column is from 1.4 to 2 MPa.

Abstract

Apparatus and process for the production of vinyl chloride by thermal cracking of
1,2-dichloroethane

5

The invention relates to a process for the production of vinyl chloride by thermal cracking, in which the energy balance, the operating time of the cracking furnace and/or the yield of the reaction are distinctly enhanced in comparison with the prior art. A pressure of from 1.4 to 2.5 MPa is established in the cracking coil at a temperature of from 450 to 550°C and, for
10 pre-heating the EDC (=1,2-dichloroethane) introduced, *inter alia* the waste heat of the gas stream leaving the top of the quench column is utilized.

Figure , Sheet A


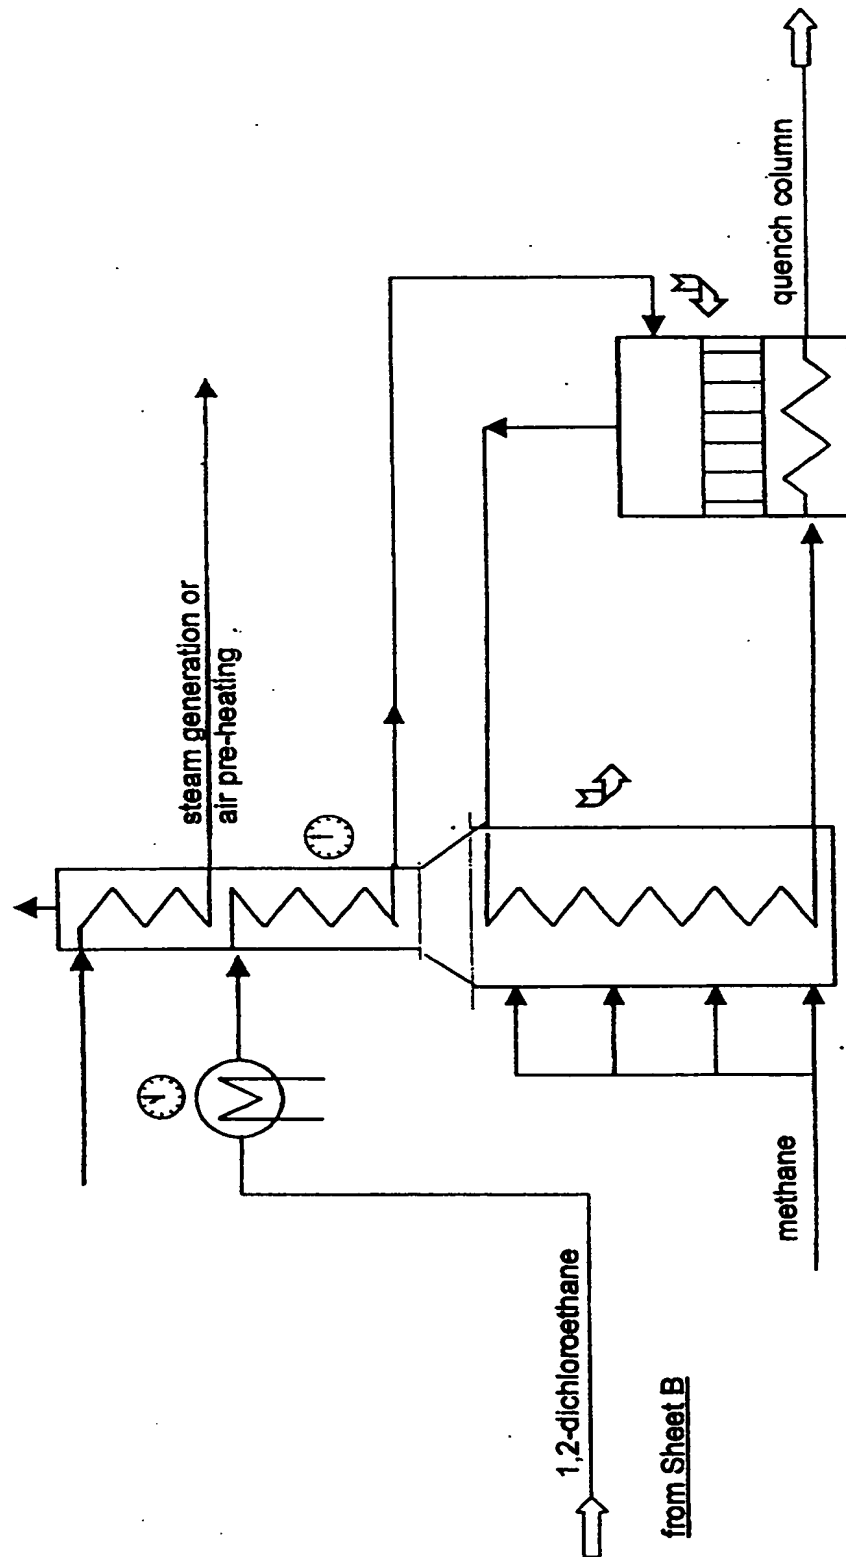


Figure , Sheet B

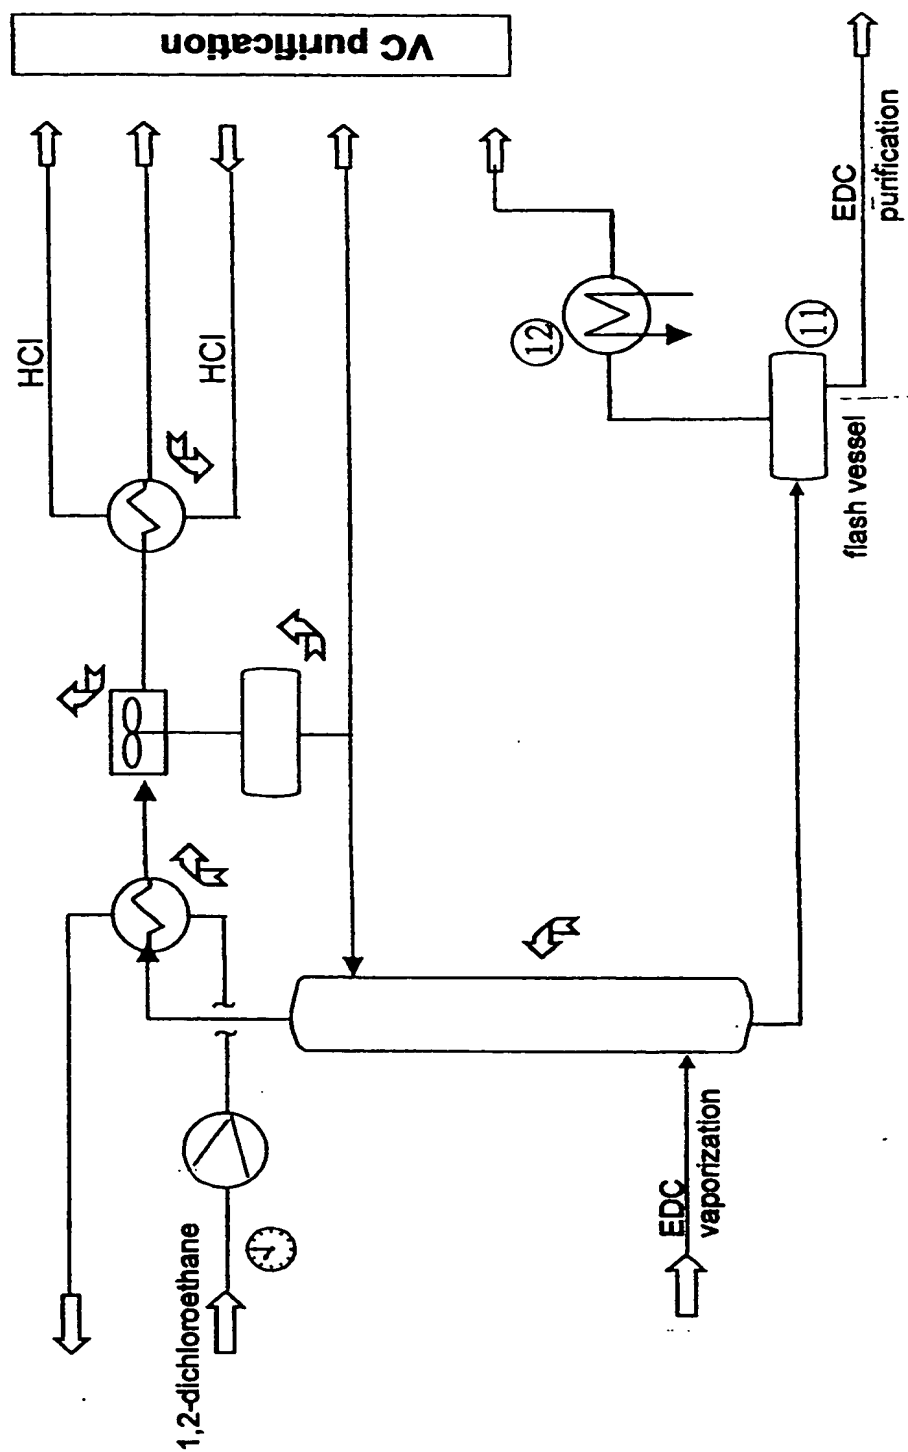

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/002763

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C07C17/25 C07C21/06 B01J19/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 270 007 A (TOSOH CORP) 8 June 1988 (1988-06-08) figure 1 column 3, line 54 - column 4, line 29 example 1	1-3
X	US 4 788 357 A (HASELWARTER KLAUS ET AL) 29 November 1988 (1988-11-29) cited in the application the whole document	1-3
A	US 4 798 914 A (SCHAFFELHOFER IWO ET AL) 17 January 1989 (1989-01-17) cited in the application the whole document	1, 4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

16 July 2004

Date of mailing of the international search report

29/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Delanghe, P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/002763

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0270007	A	08-06-1988	JP 6092328 B	16-11-1994
			JP 63139140 A	10-06-1988
			DE 3784856 D1	22-04-1993
			DE 3784856 T2	24-06-1993
			EP 0270007 A2	08-06-1988
			US 4960963 A	02-10-1990
US 4788357	A	29-11-1988	DE 3440685 A1	07-05-1986
			DE 3561315 D1	11-02-1988
			EP 0180925 A2	14-05-1986
			JP 1611495 C	30-07-1991
			JP 2036576 B	17-08-1990
			JP 61115035 A	02-06-1986
US 4798914	A	17-01-1989	DE 3704028 A1	14-04-1988
			AU 599152 B2	12-07-1990
			AU 7950087 A	14-04-1988
			BR 8705418 A	24-05-1988
			CA 1300645 C	12-05-1992
			CS 8707294 A3	12-08-1992
			DD 265617 A5	08-03-1989
			DE 3765221 D1	31-10-1990
			EP 0264065 A1	20-04-1988
			FI 874428 A ,B,	11-04-1988
			GR 3001227 T3	30-07-1992
			HU 44996 A2	30-05-1988
			HU 202175 B	28-02-1991
			IN 170264 A1	07-03-1992
			JP 2509637 B2	26-06-1996
			JP 63096141 A	27-04-1988
			MX 169575 B	13-07-1993
			NO 874236 A ,B,	11-04-1988
			PL 268146 A1	08-12-1988
			SU 1598862 A3	07-10-1990
			ZA 8707608 A	25-05-1988